
# SolarEdge Energy Net Plug-In

### Wireless Mesh Network

**Model: ENET** 

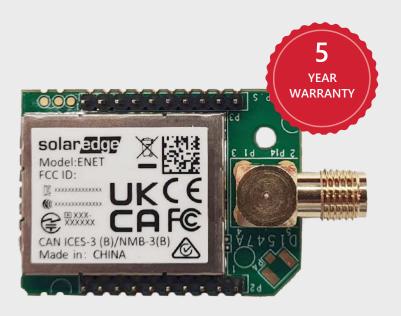

# COMMUNICATIONS

# One communication platform for seamless device connection within the SolarEdge Smart Energy Management ecosystem

- Faster, easier and cleaner installations
  - Avoids the hassle of wired infrastructure with wireless connectivity between inverter and system devices
  - Simple plug and play connection
  - Automatic device detection and configuration using SetApp
- Field-proven wireless technology
  - Mesh network topology enabling long-range transmissions
  - Robust performance in challenging environments

- Connectivity you can count on
  - Reliable communications with no single point of failure
  - Secured telemetry with advanced device authentication and data encryption



# / SolarEdge Energy Net Plug-In


PART NUMBER		ENET-xBNP-01	ENET-xBCL-01	ENET-xBRP-01	UNIT
PERFORMAN	CE				
Transmit Power (Max)		17(1)			dBm
Receiver Sensitivity		-100			dBm
EIRP with Antenna		22 <sup>(1)</sup>			dBm
Indoor Range (none line of sight)		50 / 160			m/ft
Frequency Band		HB 863-876, 902-930			MHz
ENVIRONME	NITAI		LB 310-358, 426-445		
Operating Temperature		-40 to 185 / -40 to +85			F/°C
Storage Temperature		-40 to 185 / -40 to +85			F/°C
MECHANICA			10 10 1037 10 10 103		17 0
Size	<b>-</b>	0.98 x 1.37 / 25 x 35	1.29 x 2.99 / 33 x 76	0.98 x 1.37 / 25 x 35	in / mm
POWER SUPE	PΙΥ	0.30 X 1.37 / 23 X 33	1.23 X 2.33 / 33 X 10	0.50 X 1.51 7 E5 X 55	,
DC Voltage (nomin			3.3		Vdc
Max Input Current		200			mA
ANTENNA			200		110.1
Antonna Pande		HB 863 - 930			NALL-
Antenna Bands		LB 310 - 445			MHz
Antenna Type		Outdoor			
Antenna Connector		RP-SMA			
VSWR		≤4.0			dBi
Gain		2			dB
Polarization		Vertical			
Material		PC Lexan 503R-WH5151L or WH8G952 Sabic			
Dimensions (Lengt			7.87 x 0.78 / 200 x 20		in / mm
COMPLIANCE	E				
US	EMC / EMI and Radio		FCC Part 15B, FCC Part 15C		
Canada	EMC / EMI	CISPR 32			
Europe	Radio	RSS-210 for SRD, RSS-102 MPE report			
	EMC / EMI Radio	CISPR 32, EN 55032, EN 55035, EN 301 489-1, EN 300 200 / 220			_
	EMC / EMI	EN 301 489-3, EN 62311 (EMF test), EN 300 200 / 220 CISPR 32 AS/NZS CISPR 32, AS/NZS 4268			
Australia	Radio	AS/NZS 4268			
	EMC / EMI	VCCI			
Japan	Radio	ARIB STD-T93, JAPAN EXTREMELY LOW POWER			
Korea	EMC / EMI and Radio	Korea RF (KN 32/35)			
Taiwan	EMC / EMI and Radio	NCC LP0002			
		ENET-xBNP-01	ENET-xBCL-01	ENET-xBRP-01	
Compatibility		Energy Net-ready inverter with the following part number format:  SEBEXX SEBZXX SEBXXX SEBLXX For example: SE7K-AUBTEBEU4	SetApp-enabled inverter  Note: Plugs into the cellular socket. Cellular plug-in or ZigBee plug-in cannot be installed in parallel	SetApp-enabled LCD inverter <sup>(2)</sup> Requires replacement communication board with LCD	

<sup>(1)</sup> Transmission power/EiRP may be higher according to each country's standard requirements (2) An Energy Net ready Communication Board with LCD is needed

## / SolarEdge Energy Net Plug-In

### Connecting inverters to the following SolarEdge products:

- SolarEdge Energy Bank
- Inline Energy Meter
- ✓ Smart Energy Devices<sup>(3)</sup>
- **✓** EV Charger<sup>(3)</sup>

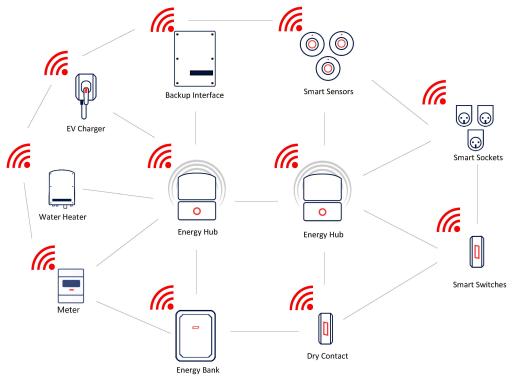

(3) Smart devices and EV charger support based on future availability

SolarEdge is a global leader in smart energy technology. Byleveraging world-class engineering capabilities and with a relentless focus on innovation, SolarEdge creates smart energy solutions that power our lives and drive future progress.

SolarEdge developed an intelligent inverter solution that changed the way power is harvested and managed in photovoltaic (PV) systems. The SolarEdge DC optimized inverter maximizes power generation while lowering the cost of energy produced by the PV system.

Continuing to advance smart energy, SolarEdge addresses a broad range of energy market segments through its PV, storage, EVcharging, UPS, and grid services solutions.

**f** SolarEdge

@SolarEdgePV

SolarEdgePV

in SolarEdge

www.solaredge.com/corporate/contact

### solaredge.com

© SolarEdge Technologies, Ltd. All rights reserved. SOLAREDGE, the SolarEdge logo, OPTIMIZED BY SOLAREDGE are trademarks or registered trademarks of SolarEdge Technologies, Inc. All other trademarks mentioned herein are trademarks of their respective owners. Date: 07/2021 DS-000057-1.6-ENG. Subject to change without notice.

Cautionary Note Regarding Market Data and Industry Forecasts: This brochure may contain market data and industry forecasts from certain third-party sources. This information is based on industry surveys and the preparer's expertise in the industry and there can be no assurance that any such market data is accurate or that any such industry forecasts will be achieved. Although we have not independently verified the accuracy of such market data and industry forecasts, we believe that the market data is reliable and that the industry forecasts are reasonable.

